



WARMER FOR MAIN OXYGEN PIPELINE MP-M

Designed for heating oxygen from cryogenic vessels and cylinder oxygen stations in winter.

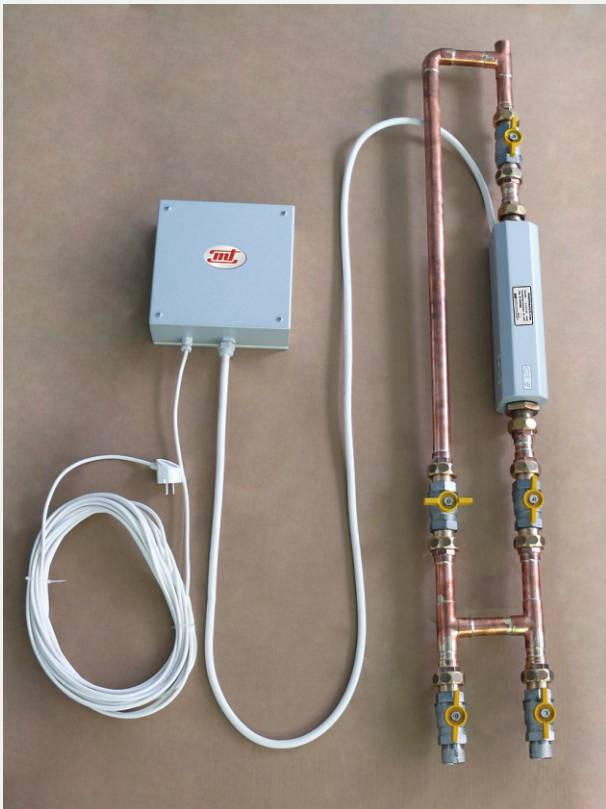


FEATURES

- Warming temperature $45 \div 60^{\circ} \text{C}$
- Power consumption 650 VA
- Power supply ~ 220V/50Hz
- Working pressure 0-20 bar
- The length of main pipeline from the warmer of oxygen to the consumer is not less than 15 m
- Dependency of the gas temperature at the output of the warmer shown in the diagram

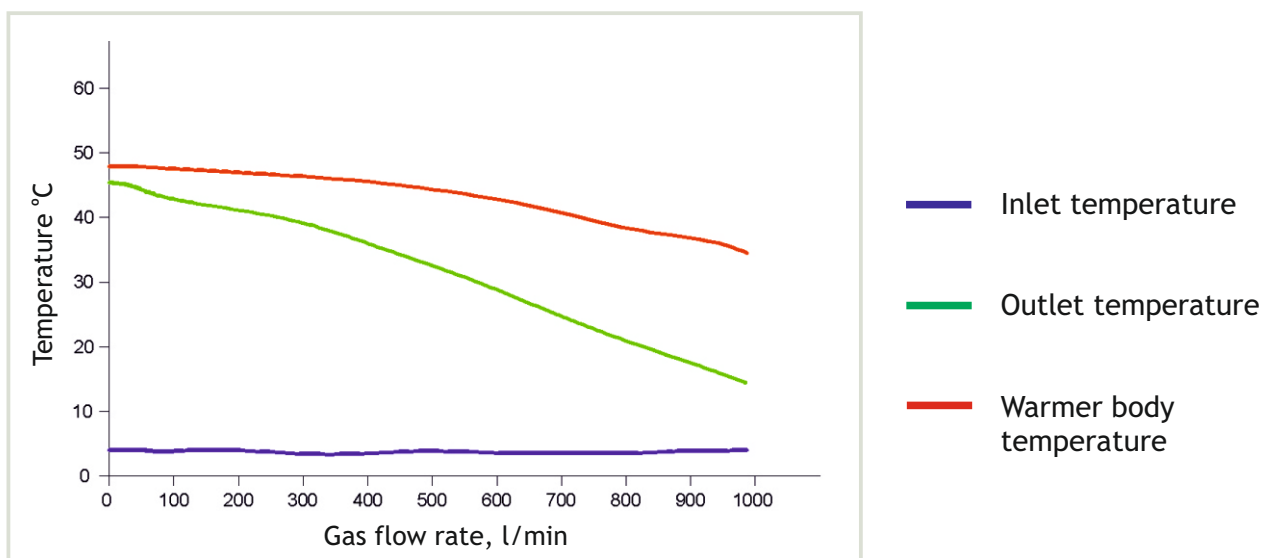

WARMER FOR HIGH PRESSURE REDUCERS

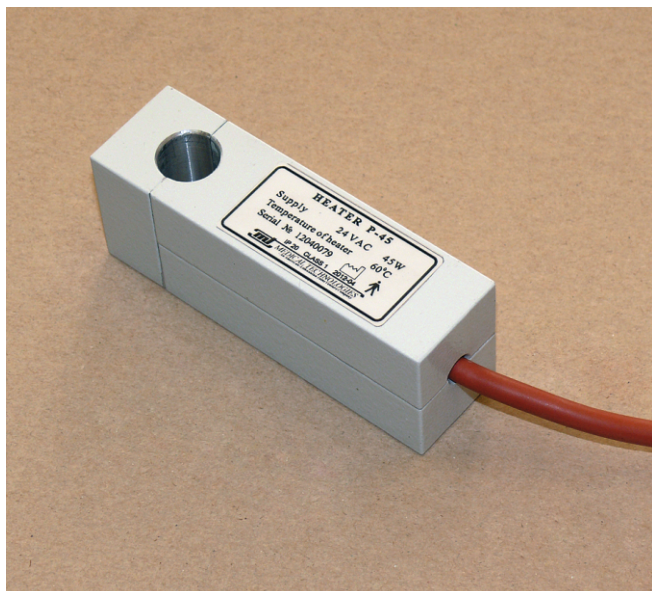

MP-01

- Warming temperature 45÷55 ° C
- Power consumption 45 W
- Power supply 24 V
- Diameter of heating pipe Ø16 mm
- Dimensions 30x40x105 mm

MP-02, MP-03

- Warming temperature 45÷55 ° C
- Power consumption:
 - MP-02 - 45 W
 - MP-03 - 60 W
 - MP-04 - 85 W
- Power supply 24 V
- Diameter of heating pipe Ø25 mm
- Dimensions 40x40x110 mm

